



Optimum F with anti-slip coating

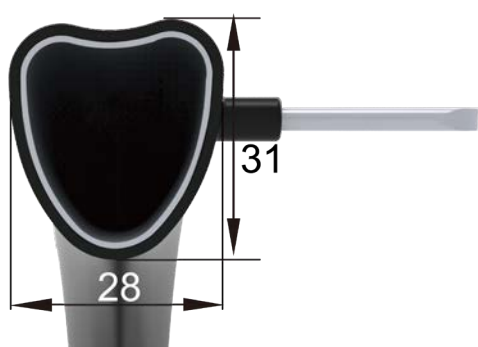

- Optimal for users with reduced hand strength
- Available with 6 splices (39210Q) or 6 rivnuts
- 1,5 mm anti-slip coating, Lizard grip

Surface treatment	Wheel Size	Type of fitting	SD / Rivnut Fitting distance	Weight g	Item no. Produced in Poland
Optimum F - Anti-slip coating	24"	6 splices	515	520	34244S-D
Optimum F - Anti-slip coating	25"	6 splices	535	540	34254S-D
Optimum F - Anti-slip coating	26"	6 splices	565	560	34264S-D
Optimum F - Anti-slip coating	24"	6 rivnuts	515	510	32244R-D

Optimum - black hard anodized

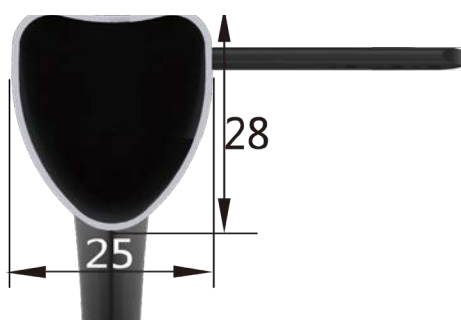

- The large and ergonomic shape gives the user a good and comfortable grip
- Available with 6 splices (39210Q) or 6 rivnuts
- Black hard anodized aluminium - very scratch resistant

Surface treatment	Wheel Size	Type of fitting	SD / Rivnut Fitting distance	Weight g	Item no.
Optimum H - Black hard anodized	24"	6 splices	510	260	34244G (NEW)
Optimum H - Black hard anodized	24"	6 splices	515	275	34244S
Optimum H - Black hard anodized	25"	6 splices	530	285	34254G
Optimum H - Black hard anodized	25"	6 splices	535	290	34254S
Optimum H - Black hard anodized	26"	6 splices	565	300	34264S
Optimum H - Black hard anodized	24"	6 rivnuts	515	270	32244R

