


Optimum ZF with anti-slip coating

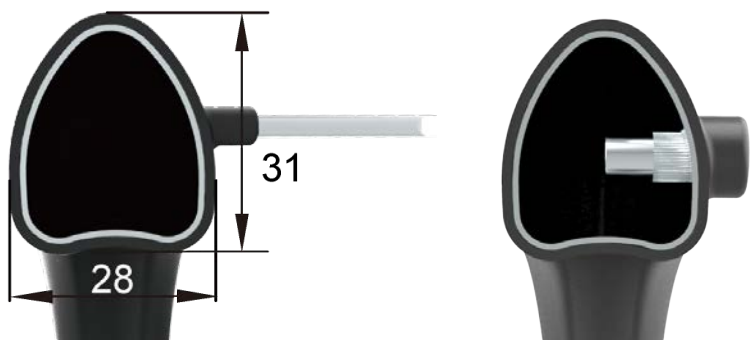

- Optimal for users with reduced hand strength
- Available with 6 splices (39210Q) or 6 rivnuts
- 1,5 mm anti-slip coating, Lizard grip

Surface treatment	Wheel Size	Type of fitting	SD / Rivnut Fitting distance	Weight g	Item no. Produced in Poland
Optimum ZF – Anti-slip Coating	24"	6 splices	515	550	3424F5-D
Optimum ZF – Anti-slip Coating	25"	6 splices	535	–	3425F5-D
Optimum ZF – Anti-slip Coating	26"	6 splices	565	–	3426F5-D
Optimum ZF – Anti-slip Coating	24"	6 rivnuts	515	–	32244M-D

Optimum Z – black hard anodized



- The large and ergonomic shape gives the user a good and comfortable grip
- Available with 6 splices (39210Q)
- Black hard anodized aluminium – very scratch resistant

Surface treatment	Wheel Size	SD Fitting distance	Weight	Item no.
Optimum ZH – black hard anodized	24"	510	265	3424FG (NEW)
Optimum ZH – black hard anodized	24"	515	275	3424F5
Optimum ZH – black hard anodized	25"	530	275	3425FG (NEW)

